


# IriVision<sup>sys</sup>

## Model: IV-SNVR1600

4K+H.265



### DATASHEET

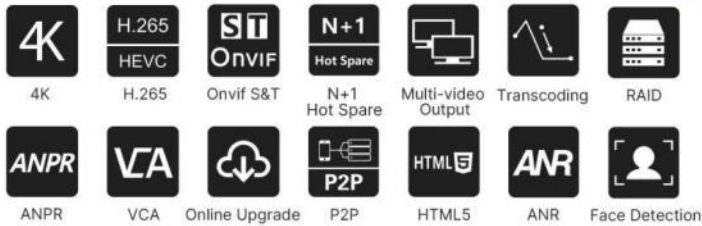

## KEY FEATURES

- ▶ 16/32-CH Network Video Input (Up to 16/32 channel IP cameras can be connected.)
- ▶ H.265<sup>+</sup> (H.265<sup>+</sup> allows to cut down 70%~80% bandwidth while ensuring the high quality of images compared with H.264.)
- ▶ HTML5 Streaming Ready (Support previewing the video via all major browsers without plug-in when Video Codec is set to H.265.)
- ▶ Transcoding (Transcoding guarantees fluid video experience by reducing the stream data via lowering resolution, bit rate, or frame rate.)
- ▶ Versatile Interfaces (A whole array of ports provides all necessary features for effective surveillance.)
- ▶ Auto Backup (The latest 24 hours' video will be automatically backed up to USB Port Devices or NAS after setting up the backup.)

### Power Decoding Capacity & Flexible Storage Options

- The 4K NVR is equipped with solid 4K decoding and display capabilities and maximum supports simultaneous viewing of 16\*1080P or 32\*720P network cameras.
- Providing flexible storage options including HDD and NAS to address the needs for versatile storage.



### Reliability and Usability

- RAID improves the disk reliability to ensure the recording security.
- ANR can store video data on the camera storage card when network between IPC and NVR is disconnected and retransfer the recorded video to NVR after network recovers.
- N+1 Hot Spare can keep the system working on and ensure the data integrity and reliability.




### AI Video Analytics & POS Integration

- All-in-one to Manage AI & ANPR: VCA Function focus on human and vehicle detection. People Counting provides high-accuracy data and statistic reports. Face Detection function supports attribute recognition. Enterprise ANPR Management makes it easy to monitor traffic.
- POS machine information can be transferred to and displayed on the NVR.



### Flexible Structure Options

- Multi-video Output in two ways: Independent Outputs and Synchronous Outputs
- Dual network ports provide three network working modes for more independence, and higher throughput and stability according to the specific applications and needs.

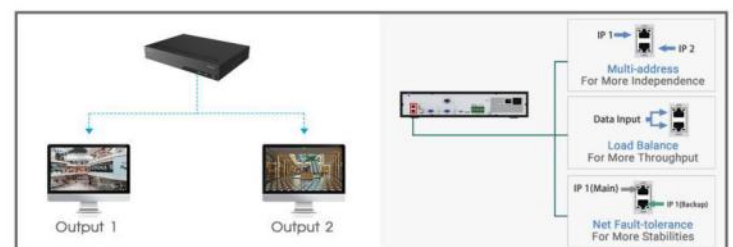




Model			MS-N7016-UH		MS-N7032-UH	
Video/Audio Input	Network Video Input		16-CH		32-CH	
	Bandwidth	Incoming	160Mbps		256Mbps or 200Mbps(when RAID is enabled)	
		Outgoing	160Mbps		256Mbps or 200Mbps(when RAID is enabled)	
Video/Audio Output	HDMI Output		1-CH, Resolution: 3840x2160/60Hz, 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz,1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output			
	VGA Output		1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz			
	Dual Stream		Support			
	Recording Resolution		12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF			
	Synchronous Playback		4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps @5MP), 8*(30fps @4MP), 10*(30fps @3MP), 16*(30fps @1080P), 16*(30fps @720P)		4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps @5MP), 8*(30fps @4MP), 10*(30fps@3MP), 16*(30fps@1080P), 32*(30fps@720P)	
Video/Audio Compression	Video Compression		H.265*/H.265(HEVC)/H.264*/H.264			
	Audio Compression		G.711/AAC/G.722/G.726			
	Sample Rate		8KHz/16KHz			
Storage	SATA		4*SATA HDD(3.5")			
	Capacity		Up to 10TB capacity for each HDD			
Disk Array	Array Type		RAID0, RAID1, RAID5, RAID6, RAID10			
Recording Management	Recording Type		Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)			
	Snapshot Type		Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)			
	Playback Type		General Playback, Event Playback, Tag Playback, Split Playback, Picture Playback			
Backup	Backup		Video Backup, Image Backup			
Network	Protocol		IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS			
External Interface	Network Interface		2*RJ45 10/100/1000Mbps			
	Serial Interface			1*RS-485 Series Port for PTZ		
				1*RS-232 Series Port for Console		
				1*RS-485 Series Port for Keyboard		
	USB Interface		1*USB 3.0; 2*USB 2.0			
	Audio Input/Output		1*RCA/1*RCA			
General	Alarm Input/Output		16-CH/4-CH			
	Compatibility		ONVIF, API			
	Advanced Function		ANR, N+1 Hot Spare			
	ANPR		Support			
	Video Analysis		Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed			
	Keyboard Control		Irvision Keyboard (MS-K01)			
	Power Supply		AC 100V~240V 50Hz~60Hz			
	Consumption		≤15W(Without HDD)			
	Working Conditions		Temperature: -10℃~55℃/Humidity: 10%~90%			
	Dimensions		Rack Mountable Chassis (1.5U Standard) 440mm(W)X320mm(D)X66.8mm(H)			
	Weight		4.1Kg			
	Warranty		2 Years			





Interfaces

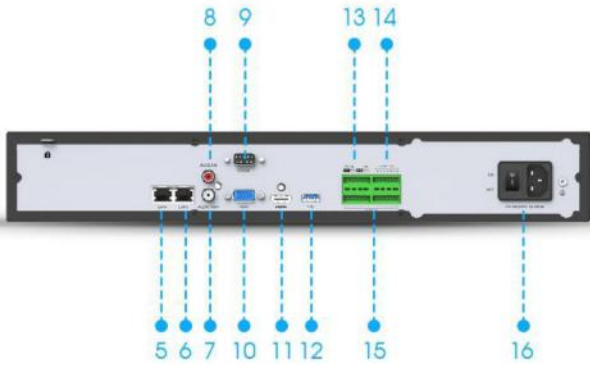

1. Run Indicator
2. HDD Indicator
3. USB
4. Power Light
5. LAN1
6. LAN2
7. Audio Out
8. Audio In
9. RS-232
10. VGA
11. HDMI
12. USB
13. RS-485
14. Alarm Out
15. Alarm In
16. Power

Installation of HDDs



Step1



Step2



Step3




Step4



Step5

Structure Diagrams

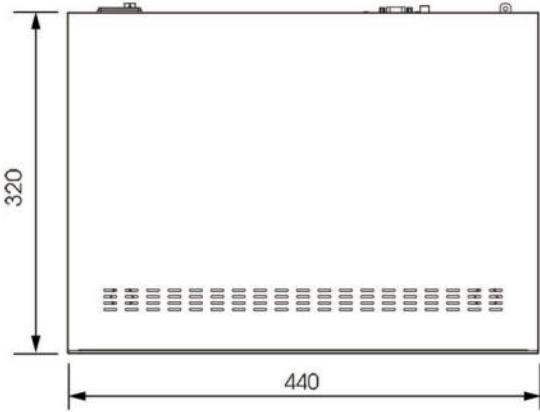

Units: mm

Naming Convention

